
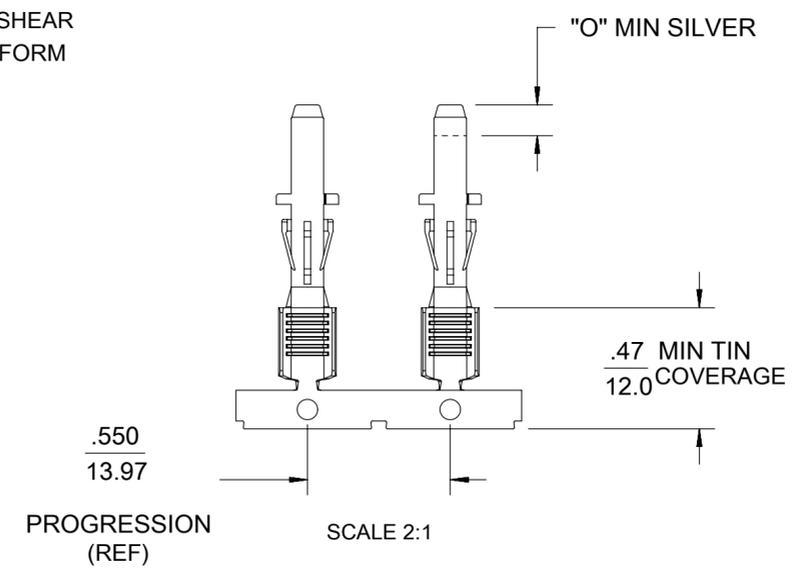
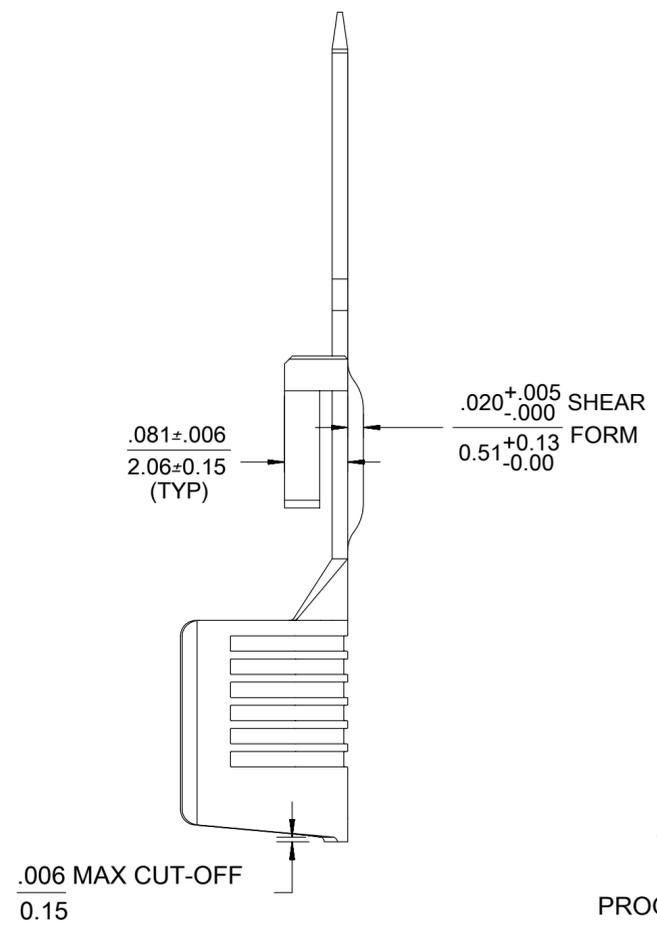
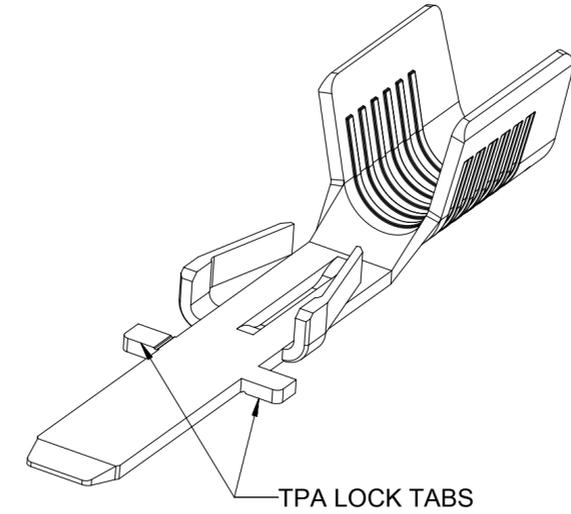


STYLE	P/N	J	K	L	O
STANDARD	171826-0100	.339/8.61	.048/1.22	1.261/32.02	.12/3.0
FINGER-PROOF	171826-0200	.301/7.65	.031/0.79	1.206/30.63	.07/1.7

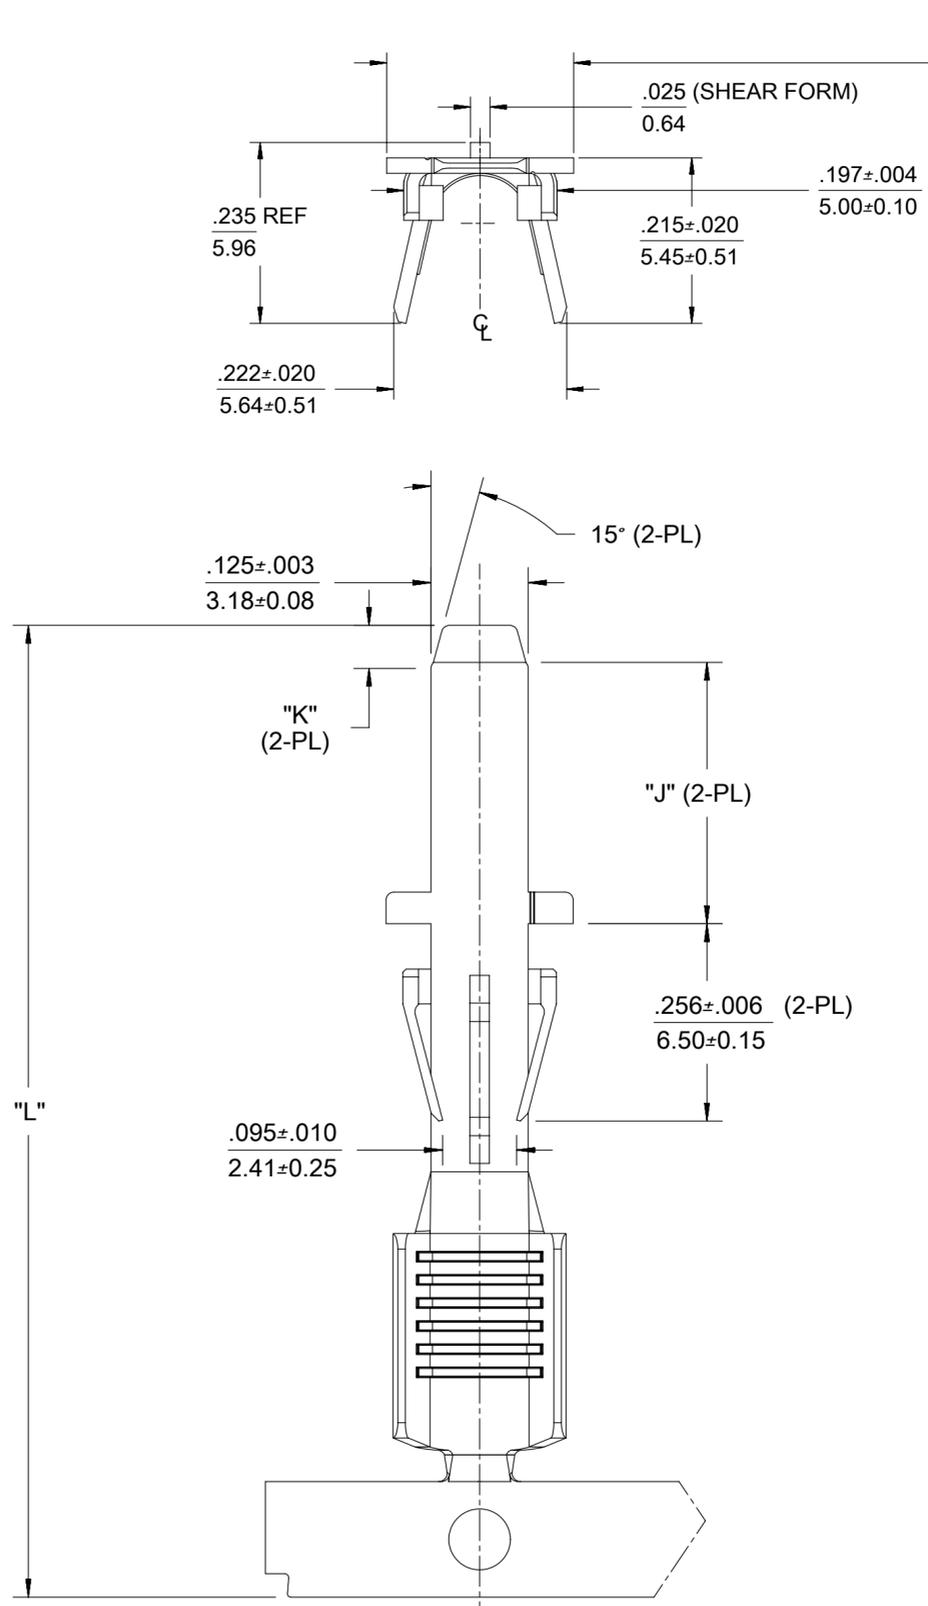

- NOTES:
1. MATERIAL: .020/0.51 THICK HSM COPPER.
 2. FINISH: SELECT SILVER (.000100/0.00254 MIN) & SELECT MATTE TIN (.000100/0.00254 MIN) OVER NICKEL OVERALL.
 3. PRODUCT SPECIFICATION: PS-171825-001.
 4. PACKAGING: 1718260000-PK.
 5. MATES WITH: 171825 FEMALE CRIMP TMLS, FOR USE IN 172673/43680 PLUG HSGS.
 6. SINGLE CRIMP TO 10 OR 12AWG STRANDED COPPER WIRE. TINNED WIRE RECOMMENDED.
 7. TERMINALS INDICATED AS "FINGER-PROOF" ARE DESIGNED TO MINIMIZE ACCESSIBILITY TO LIVE PARTS PER UL1977 AND UL60950 (FORMERLY UL1950) FINGER PROBE REQUIREMENTS.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
	DIMENSION UNITS	SCALE	CURRENT REV DESC: ADD PK SPEC		
▽ = 0	IN/MM	6:1	<p>molex</p> <p>SUPER-SABRE MALE CRIMP TERMINAL</p> <p>PRODUCT CUSTOMER DRAWING</p> <p>DOCUMENT NUMBER: SD-171826-001 DOC TYPE: PSD DOC PART: 000 REVISION: B2</p> <p>MATERIAL NUMBER: SEE CHART CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1</p>		
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				
▽ = 0	MM	INCH			
▽ = 0	4 PLACES ±	±			
▽ = 0	3 PLACES ±	± 0.01	<p>EC NO: 617584</p> <p>DRWN: JEHRISMAN 2019/04/02</p> <p>CHK'D: MKIPPER 2019/06/13</p> <p>APPR: FSMITH 2019/06/18</p>		
▽ = 0	2 PLACES ±	± 0.25 ± 0.014	<p>INITIAL REVISION:</p> <p>DRWN: GES 2013/04/02</p> <p>APPR: FSMITH 2013/10/09</p>		
▽ = 0	1 PLACE ±	± 0.35 ±	<p>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p>		
▽ = 0	0 PLACES ±	±	<p>THIRD ANGLE PROJECTION</p> <p>DRAWING: C-SIZE SERIES: 171826</p>		
▽ = 0	ANGULAR TOL	± 0.5 °	<p>SEE CHART</p>		