



環保物料專用

RoHS compliant

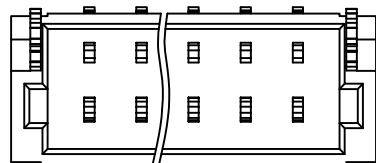

Ordering Information
CCSH-W10R-XXTR-BK-A




(02 TO 20
Contacts)

In Tape
& Reel

10pcs/Bag
& label

SPECIFICATIONS

Current rating :1A AC,DC
Voltage rating :50V AC,DC
Temperature range :−25°C~+85°C
Contact resistance :20mΩMax
Insulation resistance :100MΩMin
Withstanding voltage :500VAC/minute
Pin Material :Phosphor Bronze
Finished :Tin-plated
Housing Material :Nylon-6T,UL94V-0
Color :Black
Packaging :In Tape Reel

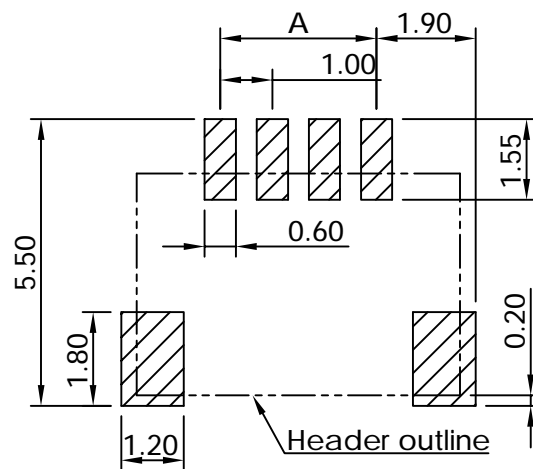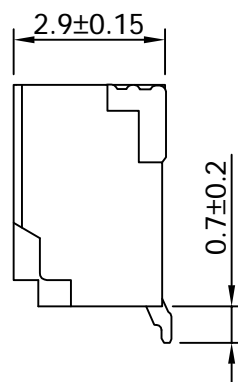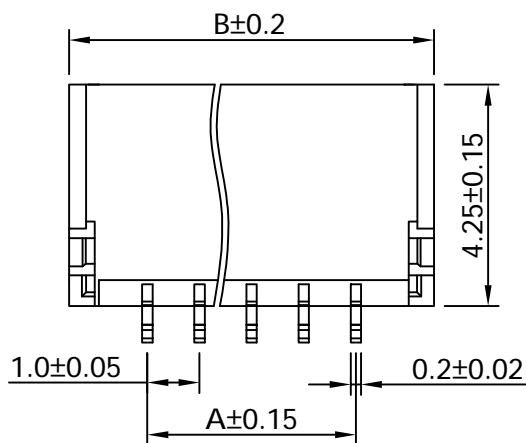

P.C.B Layout

Circuits	Dimensions	
	A	B
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00



DESCRIPTION(內容):
1.00MM WAFER 90° SMT TYPE
REEL PACKAGE

DRAWN(製圖):
Tom Liu

CHECKED(確認):
Jack Wu

APPROVAL(核准):
Kane He

GENERAL TOLERANCE

LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

REV:
A/1

UNIT:
mm

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION


ORIGINAL

DATE

Mar-07-2016

A4

SCALE(比例):
1:XX



PART NO:
(料號) CCSH-W10R-XXTR-BK-A
DWG NO(圖號): KWRD160307-016

A

B

C

D

E